


DIESEL REFUELLING PUMPS

DATASHEET

Delta 595A – 24v


Flow rates: 120 l/min
Hose dimension: 1" BSP (female)
Suction height: 3 – 4 mtrs
Rated power: 0,84kw
Rated voltage: 24 V
Rated current: 47 A
Rated speed: 2500 rpm
Operation mode: S2-12 min
Protection: IP44
Rotation: C.W
Weight w/motor: 13, 9 kg

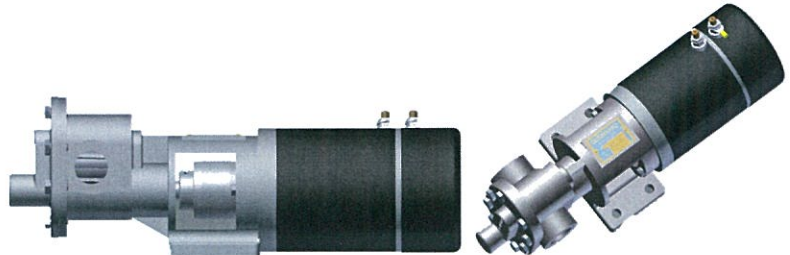

- ✚ Deltapump type 595A is a fast-running gear-pump directly connected to a 24V DC electro-motor.
- ✚ The motor is designed for intermittent use only – max rating 12 minutes from time to time.
- ✚ There will be no damage to the pump even periodically running dry.
- ✚ The motor is enclosed (IP44) and the pump aggregate location must be protected against mud- and water flushing and heavy showers.

Delta 595B – 24v

Flow rates: 150 l/min
Hose dimension, inlet: 1 ½" BSP (male)
Hose dimension, outlet: 1" BSP (female)
Suction height: 3 – 4 mtrs
Rated power: 0,84kw
Rated voltage: 24 V
Rated current: 47 A
Rated speed: 2500 rpm
Operation mode: S2-12 min
Protection: IP44
Rotation: C.W
Weight w/motor: 14, 0 kg

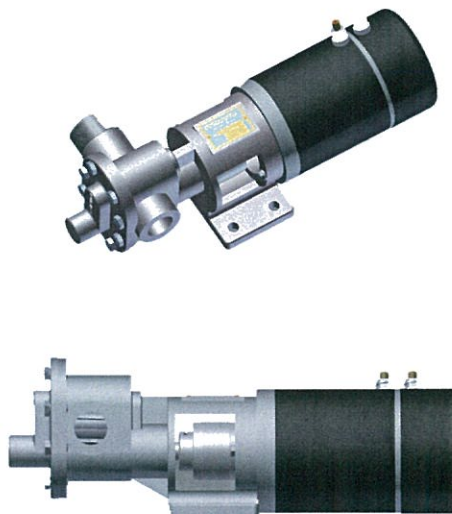

- ✚ Deltapump type 595B is a fast-running gear-pump directly connected to a 24V DC electro-motor.
- ✚ The motor is designed for intermittent use only – max rating 12 minutes from time to time.
- ✚ There will be no damage to the pump even periodically running dry.
- ✚ The motor is enclosed (IP44) and the pump aggregate location must be protected against mud- and water flushing and heavy showers.